




HP Heavyweight Coated Paper



The HP DesignJet printing system—the complete solution

HP DesignJet printers, Original HP inks and printheads, Original HP printing materials and HP Scitex printers, are designed to work together as a system to provide reliable, consistent results with every print.

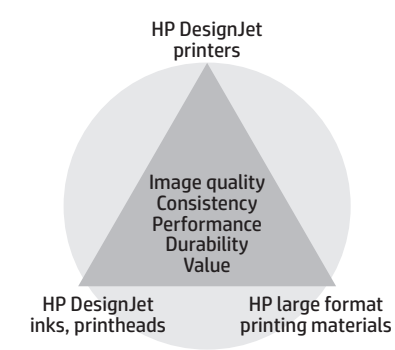

Accomplish more with consistent results

Produce high-quality, fast-drying results

Roll or stack your time-sensitive documents right off the printer. Ideal for rich, color-accurate prints, working comps, and design proofs, this heavyweight paper is easy to handle and provides high-quality, consistent results. From line drawings to illustrations and light ink-density graphics, see high-quality, consistent image quality print to print and roll to roll.

Improve your response time

Handle prints with confidence right off the printer. An enhanced coating provides ink abrasion resistance to help you deliver on quick turnaround times.

Do more, with the environment in mind

Gain versatility with this premium bright white paper. From working comps and design proofs to fine line drawings and illustrations, meet the project needs and the environmental objectives of your company and clients with this recyclable paper,¹ FSC®-certified paper.²

Target customers	Applications	Benefits
Architects	Posters and presentations	Rich, color-accurate prints and consistent, high-quality results
Engineers	POP and retail displays	Resistance to ink abrasion for easy handling
Geographic Information Systems (GIS) professionals	Geographic Information Systems (GIS)	100+ years display permanence indoor ² ; in-window 3 months unlaminated, 2 years laminated ³
Graphic designers	Architecture (AEC) and engineering (MCAD)	Recyclable through commonly available program ¹
Print service providers		FSC®-certified paper. ⁴

Technical specifications



HP Heavyweight Coated Paper

For the latest ICC profiles/paper presets, please visit [HPLFMedia.com/paperpresets](https://hplfmedia.com/paperpresets).

Weight	130 g/m² per ISO 536 Test Method, (35 lbs)			
Thickness	167 microns/6.6 mil per ISO 534 Test Method			
Opacity	96% per TAPPI T-425 Test Method			
Brightness	89% per TAPPI T-452 Test Method			
Whiteness	144 per CIE Ganz 82 Test Method			
Finish	Matte			
Operating temperature	15 to 35° C / 59 to 95° F			
Operating humidity	20 to 80% RH			
Display permanence (Indoor home or office)	100+ years with Original HP 83 UV inks ²			
Display permanence (Commercial in-window)	3 months unlaminated, 2 years laminated with Original HP 91 Photo Inks ³			
Dry time	Immediate (at 23° C, 50% RH)			
Shelf life	1 year, unopened in original packaging			
Storage temperature	0 to 40° C / 32 to 104° F			
Storage humidity	5 to 95% RH			
Environmental	Recyclable through commonly available recycling programs ¹ and FSC®-certified. ⁴			
Country of origin	Product of Germany			
Ordering information	Product numbers	Roll sizes	UPC Codes	Region
	C6029C	610 mm x 30,5 m (24 in x 100 ft)	848412013108	North America, Europe, Asia
	C6030C	914 mm x 30,5 m (36 in x 100 ft)	848412013115	Worldwide
	C6569C	1067 mm x 30,5 m (42 in x 100 ft)	848412013122	Worldwide
	C6570C	1372 mm x 30,5 m (54 in x 100 ft)	848412013146	North America, Europe, Asia
	C6977C	1524 mm x 30,5 m (60 in x 100 ft)	848412013153	Worldwide
	Q1956A	1067 mm x 67,5 m (42 in x 225 ft)	848412013139	North America, Europe
	Q1957A	1524 mm x 67,5 m (60 in x 225 ft)	848412013160	North America, Europe

Warranty

HP large format printing materials are free from defects in materials and workmanship. For warranty statement, please see [HPLFMedia.com/mediawarranties](https://hplfmedia.com/mediawarranties). To obtain warranty service, please contact Brand Management Group customer support at [HPLFMedia.com/hp/en/contactus](https://hplfmedia.com/hp/en/contactus).

¹ HP Large Format Media take-back program availability varies. Some recyclable HP papers can be recycled through commonly available recycling programs. Recycling programs may not exist in your area. See [HPLFMedia.com/hp/ecosolutions](https://hplfmedia.com/hp/ecosolutions) for details.

² Display permanence rating for interior displays/away from direct sunlight, under glass by HP Image Permanence Lab and/or by Wilhelm Imaging Research, Inc. on a range of HP media. For more information, see [HPLFMedia.com/printpermanence](https://hplfmedia.com/printpermanence).

³ Interior in-window display ratings by HP Image Permanence Lab on a range of HP media. HP predictions based on test data under Xenon-Arc illuminant—calculation assumes 6,000 Lux/12 hr day. For more information, see [HPLFMedia.com/printpermanence](https://hplfmedia.com/printpermanence).

⁴ BMG trademark license code FSC®-C115319, see [fsc.org](https://www.fsc.org). HP trademark licence code FSC®-C017543, see [fsc.org](https://www.fsc.org). Not all FSC®-certified products are available in all regions. For information about HP large format printing materials, please visit [HPLFMedia.com](https://hplfmedia.com).



Note: Not all FSC®-certified products are available in all regions.

For detailed information on the HP large format printing materials portfolio and to order, visit [HPLFMedia.com](https://hplfmedia.com)

© 2017 HP Development Company, L.P. © 2017 Brand Management Group. The information contained herein is subject to change without notice.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP and BMG shall not be liable for technical or editorial errors or omissions contained herein.

HP is a registered trademark of HP Development Company, L.P. and is used by Brand Management Group on license from HP Development Company, L.P.

