




# HP Universal Coated Paper



## The HP Designjet printing system—the complete solution

HP Designjet printers, Original HP inks and printheads, Original HP printing materials and HP Scitex printers, are designed to work together as a system to provide reliable, consistent results with every print.

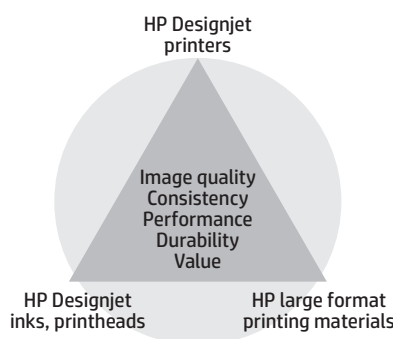

## Accomplish more with consistent results

Look to this economical, recyclable<sup>(1)</sup> and FSC®-certified printing material, ideal for a variety of graphics and technical applications from presentations and indoor signs to posters that are frequently replaced. From working comps and design proofs to POP signage and special event posters, see high-quality, consistent image quality print to print and roll to roll.

### Make the economical choice for everyday prints

Meet your everyday printing needs and enjoy consistent, high-quality results with this economical matte coated paper.

### Add flexibility—this paper is FSC®-certified

Use this high-quality printing material across a broad range of HP Designjet printers. Get added flexibility with this recyclable FSC®-certified paper that supports the development of responsible forest management worldwide.

Target customers	Applications	Benefits
Architects	Posters and presentations	Consistent, high-quality results
Engineers	POP and retail displays	Cost-effective for everyday use
Geographic Information Systems (GIS) professionals	Geographic Information Systems (GIS)	Broad HP Designjet printer compatibility <sup>(2)</sup>
Graphic designers	Architecture (AEC) and engineering (MCAD)	FSC®-certified paper
Print service providers		Recyclable through commonly available programs

Technical specifications



HP Universal Coated Paper

Weight	90 g/m² per ISO 536 Test Method, (24 lbs)			
Thickness	124 microns/4.9 mil per ISO 534 Test Method			
Opacity	89% per TAPPI T-425 Test Method			
Brightness	89% per TAPPI T-452 Test Method			
Whiteness	117 per CIE Ganz 82 Test Method			
Finish	Matte			
Operating temperature	15 to 30° C / 59 to 86° F			
Operating humidity	20 to 70% RH			
Dry time	Immediate (at 23° C, 50% RH)			
Shelf life	2 years, unopened in original packaging			
Storage temperature	5 to 40° C / 41 to 104° F			
Storage humidity	10 to 80% RH			
Recyclability	Recyclable through commonly available recycling programs			
Country of origin	Product of France			
Ordering information	Product numbers	Roll sizes	UPC Codes	Region
	Q1404A²	610 mm x 45,7 m (24 in x 150 ft)	848412013689	Worldwide
	Q1405A²	914 mm x 45,7 m (36 in x 150 ft)	848412013696	Worldwide
	Q1406A²	1067 mm x 45,7 m (42 in x 150 ft)	848412013702	Worldwide
	Q1408A²	1524 mm x 45,7 m (60 in x 150 ft)	848412013719	Worldwide
	SA027A	610 mm x 45,7 m (24 in x 150 ft)	848412014310	Japan

1 Recyclable through commonly available programs.  
2 Requires 2-inch spindle for compatibility with the Latex 260.



The mark of responsible forestry  
Note: Not all FSC®-certified products are available in all regions.

