




HP Premium Instant-dry Satin Photo Paper



The HP Designjet printing system—the complete solution

HP Designjet printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide reliable, consistent results with every print.

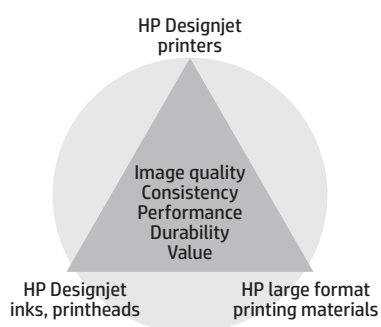

See it instantly—images pop right off the page

Impress with unrivaled image quality

Make an even bigger impression. Improved HP Premium Instant-dry Satin Photo Paper delivers unrivaled image quality for brilliant photos and high-impact display graphics—from posters and presentations to retail graphics.

Save time and money with instant-dry prints

Save time, streamline your workflow, and increase your productivity. Prints dry instantly for immediate handling and lamination. And HP Premium Instant-dry Satin Photo Paper delivers the easy, trouble-free printing you expect from HP.

Gain versatility, print with the environment in mind

Count on long-lasting prints with this FSC®-certified paper. Get great results for indoor display graphics, whether you're printing with HP dye- or pigment-based inks. And get exceptional print permanence, in-window¹ or away from direct sun.²

Target customers	Applications	Benefits
Commercial photographers	Trade show and event displays	Improved satin finish for better texture and gloss uniformity
Photo labs	Posters and presentations	Better image quality with Original HP dye-based inks (more vivid colors, deeper blacks, finer detail)
Print service providers	POP and retail displays	Better image quality with Original HP pigment-based inks (deeper blacks)
Graphic designers	Photo enlargements	Noticeably whiter sheet
Artists	Art reproductions	Higher opacity
	Geographic Information Systems (GIS)	Durable, long-lasting prints
		FSC®-certified paper
		Recyclable through commonly available programs ³

Technical specifications



HP Premium Instant-dry Satin Photo Paper

Weight	260 g/m² per ISO 536 Test Method			
Thickness	261 microns/10.3 mil per ISO 534 Test Method			
Opacity	97% per TAPPI T-425 Test Method			
Brightness	92% per TAPPI T-452 Test Method			
Whiteness	104 per CIE Ganz 82 Test Method			
Finish	Satin			
Operating temperature	15 to 30° C / 59 to 86° F			
Operating humidity	30 to 80% RH			
Display permanence (Indoor home or office)	Up to 200 years with Original HP 772, HP 91, or HP 70 Photo Inks, or HP 771 Vivid Photo Inks; up to 100 years with HP 83 UV inks ⁴			
Display permanence (Commercial in-window, unlaminated)	Up to 1 year with Original HP 771 Vivid Photo Inks ⁵			
Display permanence (Commercial in-window, laminated)	Up to 2 years with Original HP 771 Vivid Photo Inks ⁵			
Water resistance	Water resistant with Original HP 772, HP 91, or HP 70 Photo Inks, or HP 771 Vivid Photo Inks ⁶			
Dry time	Less than 2 minutes (at 23° C, 50% RH)			
Lamination	Yes, hot or cold			
Shelf life	2 years, unopened in original packaging			
Storage temperature	18 to 30° C / 64 to 86° F			
Storage humidity	35 to 65% RH			
Recyclability	In North America and Asia (including Japan), recyclable in consumer collection systems that can accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collection systems that accept liquid packaging			
Country of origin	Product of Germany			
Ordering information	Product numbers	Roll sizes	UPC codes	Region
	Q7992A	610 mm x 22,9 m (24 in x 75 ft)	848412013337	Worldwide
	Q7994A	914 mm x 30,5 m (36 in x 100 ft)	848412013344	Worldwide
	Q7996A	1067 mm x 30,5 m (42 in x 100 ft)	848412013351	Worldwide
	Q7998A	1270 mm x 30,5 m (50 in x 100 ft)	848412013368	Americas, Asia
	Q8000A	1524 mm x 30,5 m (60 in x 100 ft)	848412013375	Worldwide



The mark of responsible forestry
Note: Not all FSC®-certified products are available in all regions.

