




HP Premium Matte Polypropylene, 2 Pack



The HP Designjet printing system—the complete solution

HP Designjet printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide reliable, consistent results with every print.

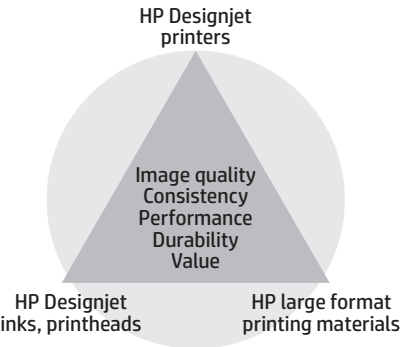

Produce brilliant, high-impact signs and banners

Deliver high-quality, durable prints

Handle these sturdy, tear-resistant prints with confidence. Providing the high-quality look and feel of photo material, you get durable performance without trading off brilliant color and edge definition.

Produce high-impact, photo-realistic signs

Produce prints with brilliant color, photo-realistic images, and the look of traditional photos—this sturdy film is ideal for a wide range of sign and event displays including photo enlargements and offers over 50 years indoor display permanence.¹

Do more, and print with the environment in mind

Offer a wide range of applications from presentations, banners, and displays to photo enlargements—and help meet the environmental objectives of your company and your clients—with this versatile, recyclable² HP printing material.

Target customers	Applications	Benefits
Print service providers	Trade show and event displays	Vibrant color, high-impact image quality
Sign shops	Posters and presentations	Excellent opacity ³ and optical density
Graphic designers	POP and retail displays	Sturdy, tear-resistant prints
	Photo enlargements	Moderately water-resistant prints ⁴
	Banners	Fast dry time
		50+ years indoor, unlaminated display permanence ¹
		Versatile compatibility with Original HP dye- and pigment-based inks
		Recyclable through the HP Large Format Media take-back program ²

Technical specifications



HP Premium Matte Polypropylene, 2 Pack

Weight	140 g/m² per ISO 536 Test Method				
Thickness	231 microns/9.1 mil per ISO 534 Test Method				
Opacity	Greater than 96% per TAPPI T-425 Test Method, 98% per ISO 2471 Test Method				
Brightness	Greater than 99% per TAPPI T-452 Test Method, 105% per ISO 2470 Test Method				
Whiteness	120 per ISO 11476 Test Method, 154 per ISO 11475 Test Method				
Finish	Matte				
Operating temperature	15 to 35° C / 59 to 95° F				
Operating humidity	20 to 80% RH				
Display permanence (Indoor home or office)	50+ years indoors, unlaminated with Original HP 771 Vivid Photo Inks or Original HP 91 Photo Inks ⁵				
Water resistance	Moderately water resistant with Original HP 771 Vivid Photo Inks or Original HP 91 Photo Inks ⁶				
Dry time	Less than 2 minutes (at 23° C, 50% RH)				
Lamination	Yes				
Shelf life	2 years, unopened in original packaging				
Storage temperature	15 to 35° C / 59 to 95° F				
Storage humidity	15 to 30% RH				
Recyclability	Recyclable through the HP Large Format Media take-back program ⁷				
Country of origin	Product of China				
Ordering information	Product numbers	Quantity	Roll sizes	UPC codes	Region
	C2T53A	2 Pack	914 mm x 22,9 m (36 in x 75 ft)	848412013405	Americas, Europe
	C2T54A	2 Pack	1067 mm x 22,9 m (42 in x 75 ft)	848412013412	Americas, Europe
	C5G02A	2 Pack	1524 mm x 22,9 m (60 in x 75 ft)	848412013429	Americas, Europe

